

WAAS CH 78411 W20A	APP CRS 201°	Rwy Idg 7702 TDZE 578 Apt Elev 599
--	------------------------	---

RNAV (GPS) Y RWY 20R



NASHVILLE INTL (BNA)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized with Rwy 20L. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cat D visibility to 1½ SM and LNAV Cats C and D visibility to 1¼ SM.

MALSF

MISSED APPROACH:
Climb to 3000 direct
RONLE and hold.

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6	CLNC DEL 126.05	CPDLC
------------------------	---	---------------------------------------	-------------------------------	---------------------------	-------

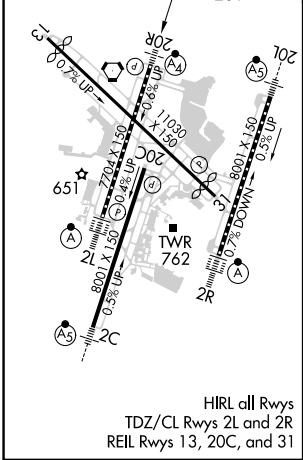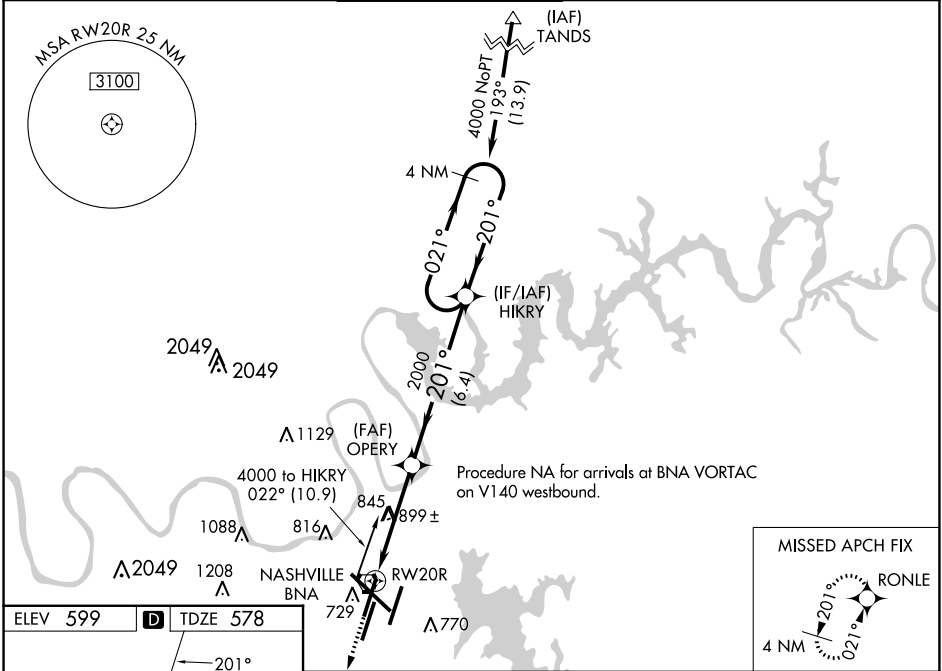

3000		RONLE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 79).			
							
*LNAV only.						4 NM Holding Pattern	
		RW20R		OPERY		HIKRY	
		*1.6 NM to RW20R		2000		021° → 4000 ← 201°	
		1.6 NM		2.8 NM		6.4 NM	
				2000		GP 3.00° TCH 60	
CATEGORY		A		B		C	
LPV DA		778/40		200 (200-¾)			
LNAV/ VNAV DA		1038-1½		460 (500-1½)			
LNAV MDA		1160/40 582 (600-¾)		1160-1½ 582 (600-1½)			
 CIRCLING		1160-1 561 (600-1)		1200-1¾ 601 (700-1¾)		1380-2½ 781 (800-2½)	