

APP CRS	Rwy Idg	8000
313°	TDZE	476
	Apt Elev	487

RNAV (RNP) Z RWY 31L

DALLAS LOVE FLD (DAL)



▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 48°C (119°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop MALSR, increase RNP 0.30 visibility all Cats to 2½ miles.

MALSR



MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct TADDI and hold.

D-ATIS 120.15	REGIONAL APP CON NORTH 124.3 282.275 SOUTH 125.2 343.65	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	CLNC DEL 127.9	CPDLC
------------------	---	---------------------------	-------------------------	-------------------	-------

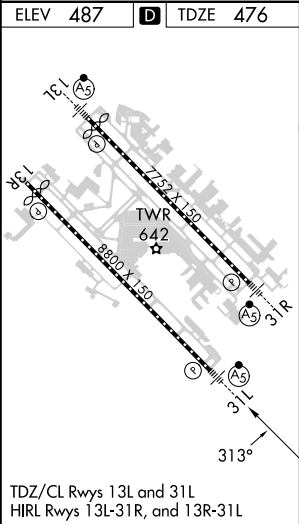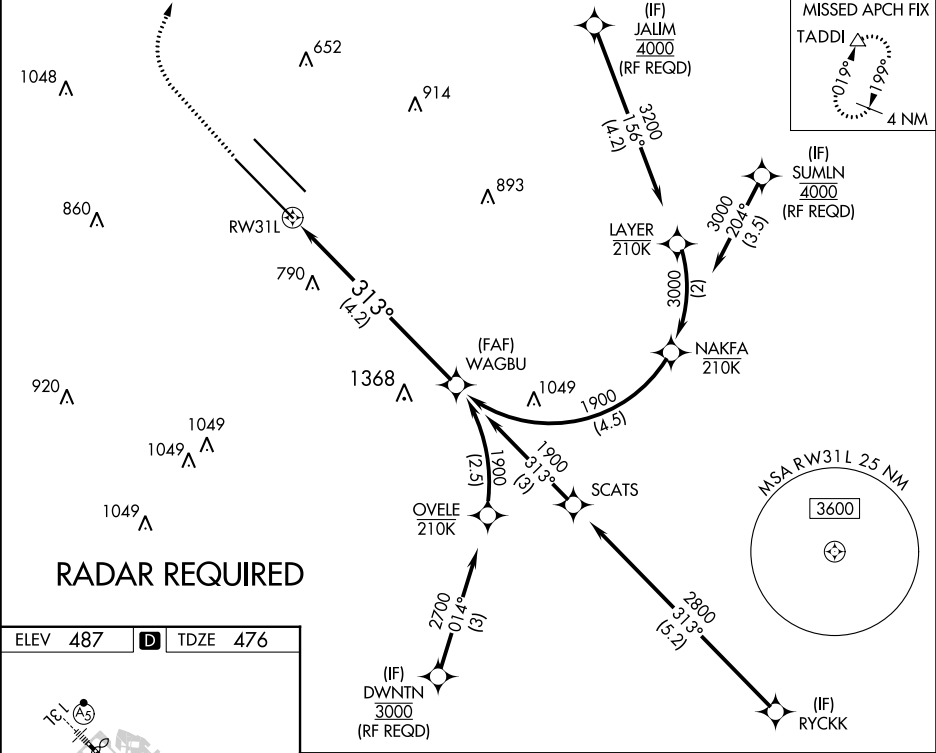

1700 4000 TADDI See planview for multiple IF locations.

WAGBU 1900
RW31 313° 4.2 NM
GP 3.08° TCH 55

CATEGORY	A	B	C	D
RNP 0.30 DA	1117-1½ 641 (700-1½)			

AUTHORIZATION REQUIRED