

WAAS CH 77617 W09A	APP CRS 090°	Rwy Idg 5998 TDZE 96 Apt Elev 112
--	------------------------	--

RNAV (GPS) RWY 9

ESLR RGNL (E'SI')

RNP APCH-GPS.


▼

▲

Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.

MISSED APPROACH: Climb to 3000 direct ILULE and hold.

ESF ASOS 119.425	POLK APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	---------------------------------

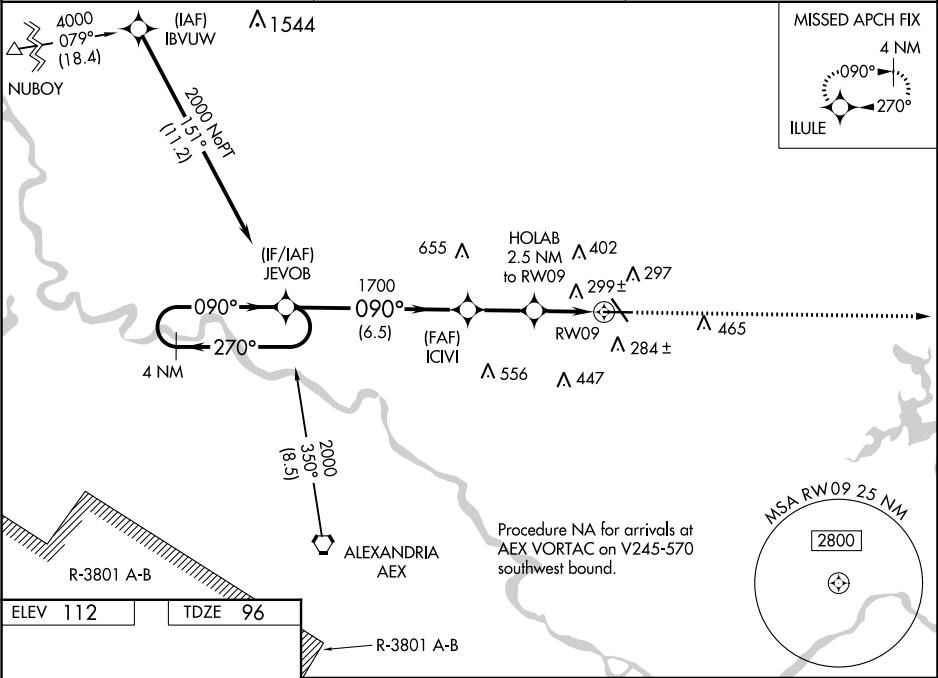

REIL Rws 9, 14 and 32

MIRL Rwy 14-32

HIRL Rwy 9-27

4 NM Holding Pattern	JEVOB	ICIVI	HOLAB 2.5 NM to RW09	RW09
2000	270°	090°	090°	
GP 3.00° TCH 53	1700	*940	*1.3 NM to RW09	
	6.5 NM	2.4 NM	1.2 NM	1.3 NM
CATEGORY	A	B	C	D
LPV DA	296-3¼		200 (200-¾)	
LNAV/VNAV DA	609-1¾		513 (500-1¾)	
LNAV MDA	560-1 464 (500-1)		560-1¾ 464 (500-1¾)	
CIRCLING	600-1 488 (500-1)		740-1¾ 628 (700-1¾) 760-2 648 (700-2)	