


WAAS CH 53343 W32B	APP CRS 322°	Rwy Idg TDZE Apt Elev	9006 31 37
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 32R

MOFFETT FEDERAL AIRFIELD (NTUQ)

RNP APCH-GPS.	MALSR	MISSED APPROACH: Climb to 3200 direct PEYIC and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat C/D visibility to 1½ SM.	AS	

ATIS 124.175 283.0	NORCAL APP CON 120.1 290.25	MOFFETT TOWER ★ 119.55 0 (CTAF) 259.65	GND CON 121.85 278.95	CLNC DEL 296.75
------------------------------	---------------------------------------	--	---------------------------------	---------------------------

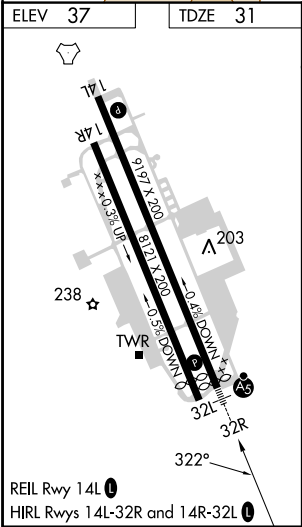

3200	PEYIC								
CATEGORY		A		B		C		D	
LPV DA		231-½ 200 (200-½)							
LNAV/ VNAV DA		442-¾ 411 (500-¾)							
LNAV MDA		500-½ 469 (500-½)				500-1 469 (500-1)			
CIRCLING		540-1 503 (600-1)	600-1 563 (600-1)	620-1½ 583 (600-1½)	780-2½ 743 (800-2½)				