WAAS CH 81805 W33A	APP CRS 329°	Rwy ldg 5000 TDZE 195 Apt Elev 211

RNAV (GPS) RWY 33
STAFFORD RGNL (RMN)

RNP APCH - GPS.

Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅜ SM.

MALS

MISSED APPROACH: Climb to 4000 direct KOBEC and left turn on track 209° to TECOV and left turn on track 151° to FALKO and hold.

AWOS-3	QUANTICO APP CON ★	GCO	UNICOM
126.325	127.05 290.375	135.075	122.725 (CTAF) L

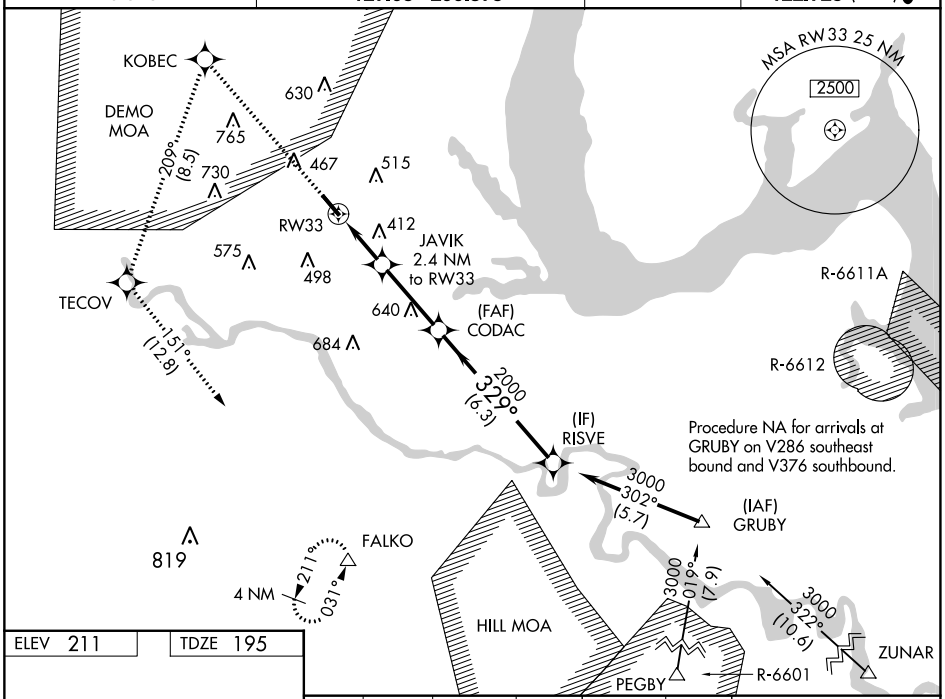

ELEV 211 TDZE 195

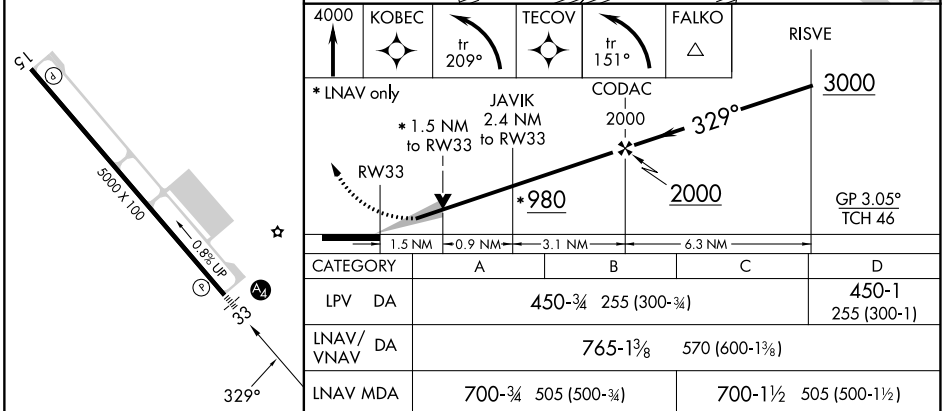

CATEGORY	A	B	C	D
LPV DA	450-¾ 255 (300-¾)			450-1 255 (300-1)
LNAV/VNAV DA	765-1⅜ 570 (600-1⅜)			
LNAV MDA	700-¾ 505 (500-¾)		700-1½ 505 (500-1½)	
CIRCLING	720-1 509 (600-1)	820-1 609 (700-1)	840-1¾ 629 (700-1¾)	1040-2¾ 829 (900-2¾)

REIL Rwy 15 L
HIRL Rwy 15-33 L

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024