


WAAS CH 49028 W31A	APP CRS 313°	Rwy Idg TDZE 1304 Apt Elev 1317	9033
--	------------------------	---	-------------

RNAV (GPS) RWY 31

ROCHESTER INTL (RST)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 direct CORDY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, increase LNAV Cat C/D visibility to RVR 5500.		

ATIS 120.5	ROCHESTER APP CON* 119.8 251.125	ROCHESTER TOWER* 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

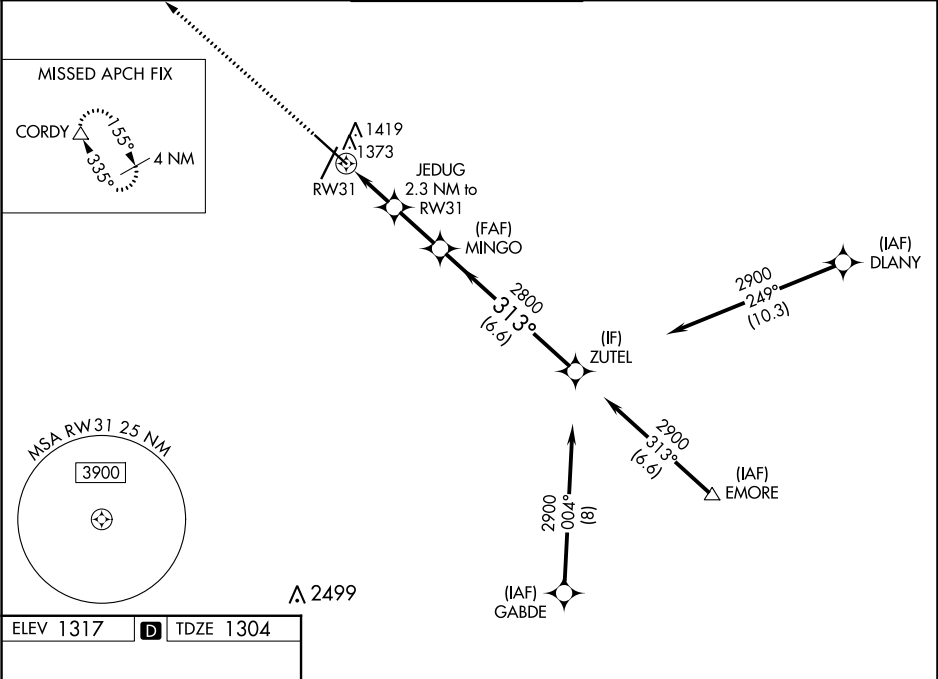

	CATEGORY			
	A			
	B			
	C			
	D			
CIRCLING	LPV	DA	1504/18 200 (200-½)	
	LNAV/VNAV	DA	1554/24 250 (300-½)	
	LNAV	MDA	1640/24 336 (400-½)	1640/35 336 (400-¾)
			1720-1 403 (500-1)	1780-1 463 (500-1)
			1900-1½ 583 (600-1½)	1900-2 583 (600-2)