


WAAS CH 42746 W16A	APP CRS 164°	Rwy Idg TDZE 4226 Apt Elev 4231
--	------------------------	---


RNAV (GPS) RWY 16R
SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 46°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat E visibility to RVR 6000, and increase LNAV Cat C/D/E visibility to 1½ SM.	ALSF-2 	MISSED APPROACH: Climb to 10000 direct BAURT and on track 164° to FFU VORTAC and hold.
---	------------	--

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 132.65 336.4	GND CON 123.775 348.6	CLNC DEL 127.3 379.975	CPDLC
---------------------------------	--	---	---------------------------------	----------------------------------	-------

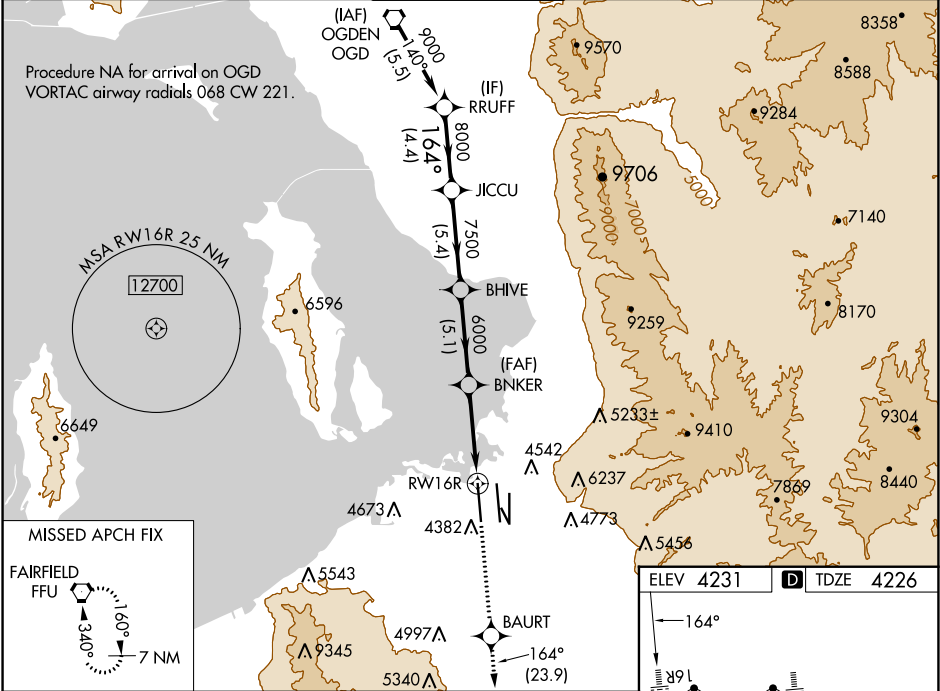

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).					
RRUFF	JICCU	BHIVE	BNKER	BAURT	FFU
9000	8000	7500	6000	10000	
GP 3.04° TCH 52					
4.4 NM 5.4 NM 5.1 NM 4 NM 1.4					
CATEGORY	A	B	C	D	E
LPV DA	4426/18		200 (200-½)		
LNAV/VNAV DA	4620/35		394 (400-5%)		
LNAV MDA	4740/24		514 (600-½)		
			4740/55 514 (600-1)		

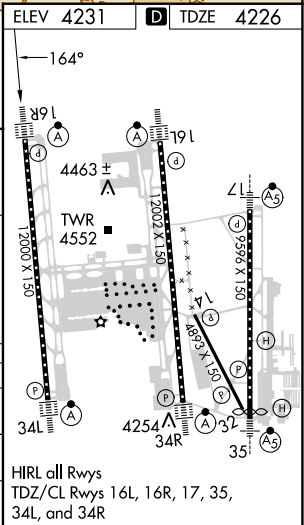

SW-4, 22 FEB 2024 to 21 MAR 2024

SW-4, 22 FEB 2024 to 21 MAR 2024