

WAAS CH 82633 W05A	APP CRS 054°	Rwy Idg TDZE 3199 Apt Elev 3204
--	------------------------	---

RNAV (GPS) RWY 5


RAPID CITY RGNL (RAP)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA with Ellsworth AFB altimeter setting.

MISSED APPROACH: Climb to 5300 direct EWEBU and hold.

ASOS 118.525	ELLSWORTH APP CON ★ 119.5 259.1	RAPID CITY TOWER ★ 125.85 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

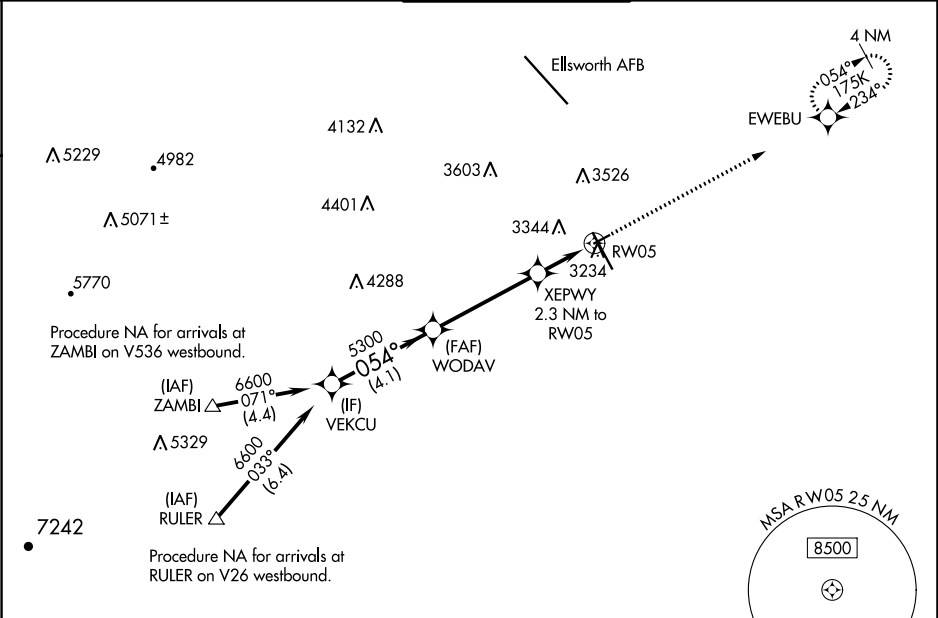

ELEV 3204	D	TDZE 3199
------------------	----------	------------------

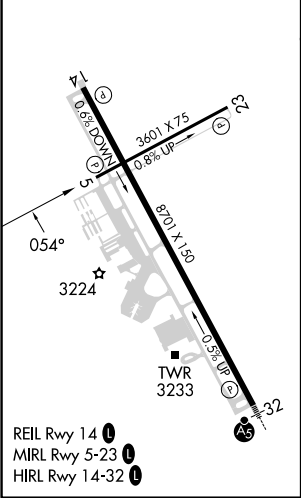

VEKCU		WODAV		XEPWY 2.3 NM to RW05		5300 ↑ EWEBU ✦ *LNAV only.	
<u>6600</u>		5300		<u>*3920</u>		*0.9 NM to RW05	
GP 3.00° TCH 34		054°		5300		RW05	
		4.1 NM		4.3 NM		1.4 NM	
						0.9 NM	
CATEGORY		A	B	C	D		
LPV	DA	3449-1	250 (300-1)	NA			
LNAV/ VNAV	DA	3449-1	250 (300-1)	NA			
LNAV	MDA	3500-1	301 (300-1)	NA			
 CIRCLING		3660-1 456 (500-1)	3840-1 636 (700-1)	NA			