


WAAS CH 69643 W16A	APP CRS 166°	Rwy Idg TDZE Apt Elev 7025 6188 6221
--	------------------------	--

RNAV (GPS) RWY 16
AFTON MUNI (AFO)

RNP APCH - GPS.	MISSED APPROACH: (Do not exceed 210K until GIGSE) Climb to 7400 then climbing right turn to 13300 direct GIGSE and hold. #Missed approach requires minimum climb of 420 feet per NM to 9000. *Missed approach requires minimum climb of 400 feet per NM to 9000.
Rwy 16 helicopter visibility reduction below 3/4 SM NA. When Afton altimeter setting not received, procedure NA. -22°C	

AWOS-3P 119.025	SALT LAKE CENTER 128.35 239.25	UNICOM 122.8 (CTAF)
---------------------------	--	-------------------------------

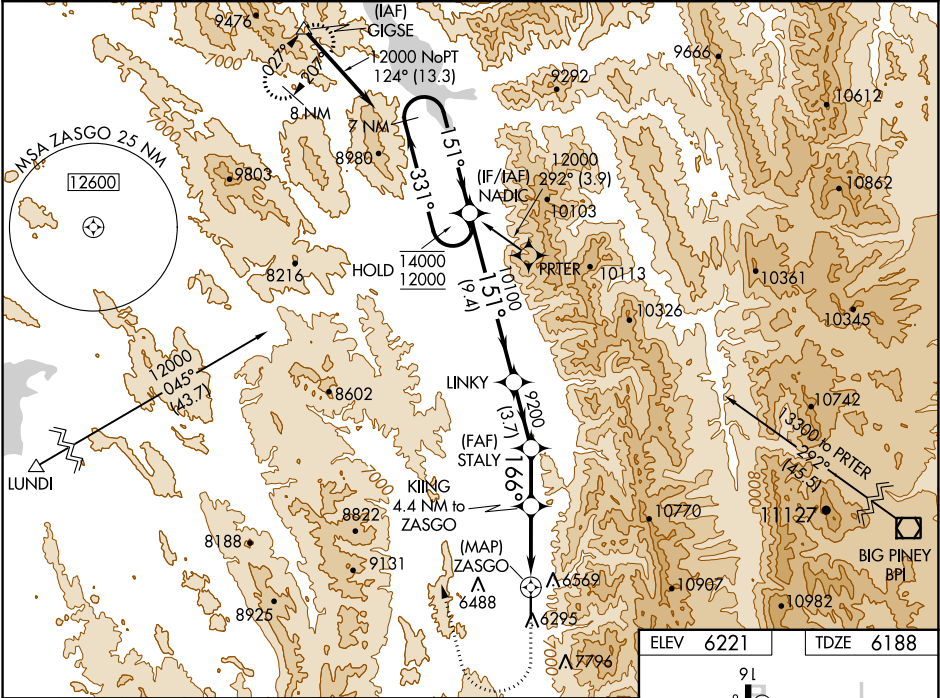

7400

13300

GIGSE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 52).

LINKY

7 NM Holding Pattern

331° 14000

151° 12000

10100

9200

8040

166°

3.1 NM to ZASGO

4.4 NM to ZASGO

3.7 NM

9.4 NM

7025 X 75

34

MIRL Rwy 16-34

REIL Rws 16 and 34

CATEGORY	A	B	C	D
LPV DA*	6485-1	297 (300-1)		NA
LPV DA	7110-2½	922 (900-2½)		NA
LNAV MDA#	7600-1¼ 1412 (1400-1¼)	7600-1½ 1412 (1400-1½)	7600-3 1412 (1400-3)	NA
LNAV MDA	7800-1¼ 1612 (1600-1¼)	7800-1½ 1612 (1600-1½)	7800-3 1612 (1600-3)	NA