
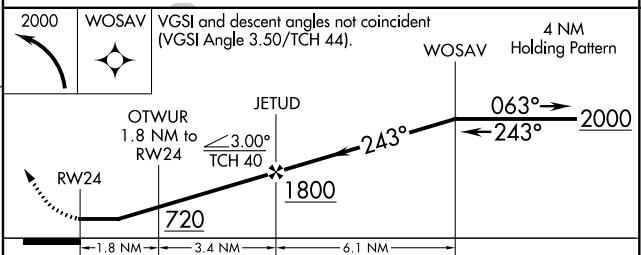
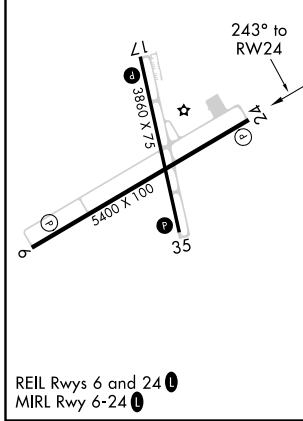


WAAS CH 40323 W24A	APP CRS 243°	Rwy Idg TDZE Apt Elev	5400 127 127
---------------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

LAKE WALES MUNI (X07)

<p>⚠ DME/DME RNP-0.3 NA. Procedure NA at night. When local altimeter setting not received, use Bartow altimeter setting and increase all MDA 40 feet.</p> <p>⚠ NA Rwy 6, 24 helicopter visibility reduction below 1 SM NA.</p>	MISSED APPROACH: Climbing left turn to 2000 direct WOSAV and hold.	
AWOS-3 124.225	MIAMI CENTER 134.55 257.7	UNICOM 122.8 (CTAF) 0

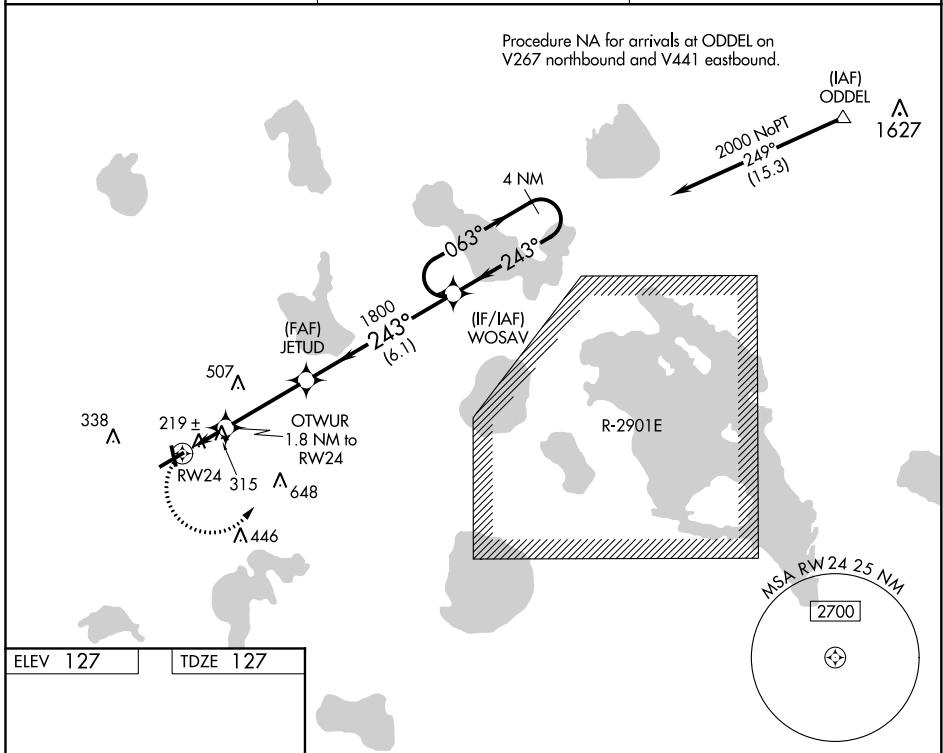

CATEGORY	A	B	C	D
LP MDA	580-1	453 (500-1)	580-1½ 453 (500-1½)	580-2 453 (500-2)
LNAV MDA	580-1	453 (500-1)	580-1½ 453 (500-1½)	580-2 453 (500-2)
CIRCLING	580-1 453 (500-1)	620-1 493 (500-1)	620-1½ 493 (500-1½)	680-2 553 (600-2)

SE-3, 08 OCT 2020 to 05 NOV 2020



SE-3, 08 OCT 2020 to 05 NOV 2020

RNAV (GPS) RWY 6


LAKE WALES MUNI (X07)

WAAS CH 49023 W06A	APP CRS 062°	Rwy Idg 5400 TDZE 127 Apt Elev 127
--	------------------------	---

RNP APCH.		
<p>▼ Circling Rwy 6, 17, 24 NA at night. Rwy 6 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 6 NA at night. When local altimeter setting not received, use Bartow altimeter setting and increase all MDA 40 feet, and increase LP and LNAV Cats C and D visibility 1/8 SM.</p> <p>▲ MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 direct ZETOK and hold.</p>		
AWOS-3 124.225	MIAMI CENTER 134.55 257.7	UNICOM 122.8 (CTAF) 0

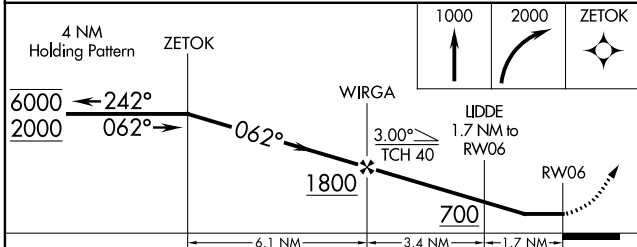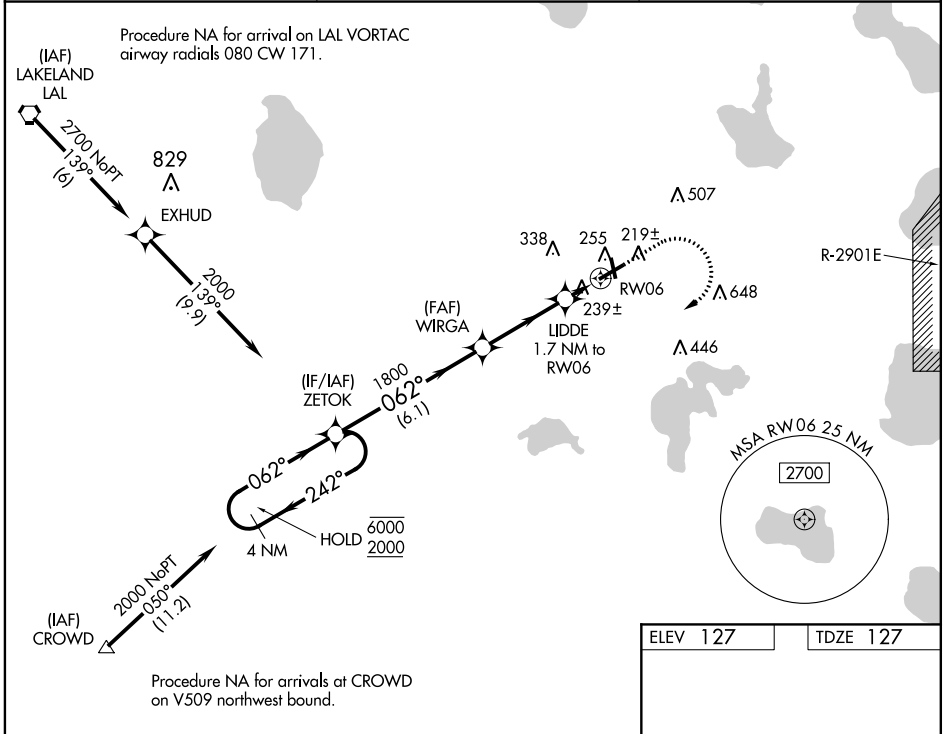

ELEV 127	TDZE 127
----------	----------

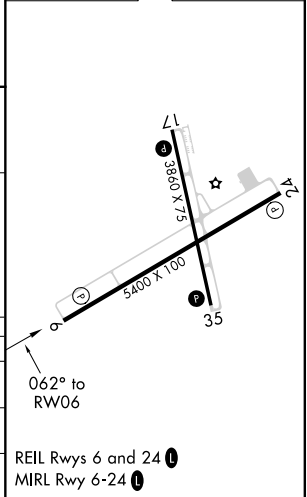

CATEGORY	A	B	C	D
LP MDA	500-1		373 (400-1)	
LNAV MDA	520-1	393 (400-1)	520-1 1/8	393 (400-1 1/8)
CIRCLING	560-1 433 (500-1)	620-1 493 (500-1)	620-1 1/2 493 (500-1 1/2)	680-2 553 (600-2)

SE-3, 08 OCT 2020 to 05 NOV 2020

SE-3, 08 OCT 2020 to 05 NOV 2020

VORTAC LAL 116.0 Chan 107	APP CRS 104°	Rwy Idg TDZE Apt Elev	N/A N/A 127
---	------------------------	-----------------------------	--




VOR/DME-B
LAKE WALES MUNI (X07)

⚠ When local altimeter setting not received, use Bartow altimeter setting and increase all MDA 40 feet. Procedure NA at night.
⚠ NA MISSED APPROACH: Climb to 700 then climbing right turn to 1600 on LAL VORTAC R-104 to MONAY/LAL 17 DME and hold.


AWOS-3
124.225

MIAMI CENTER
134.55 257.7

UNICOM
122.8 (CTAF) 0

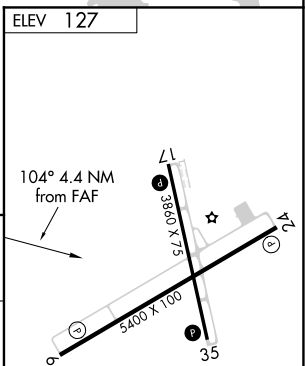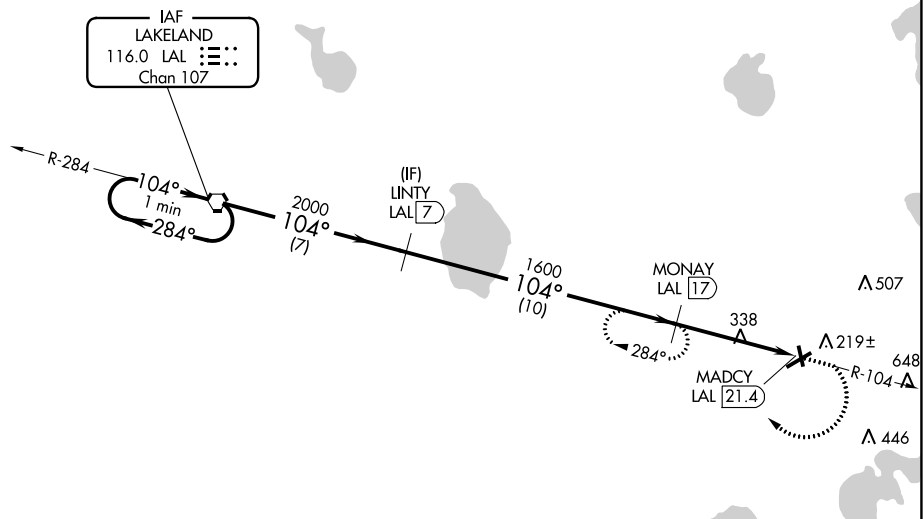

⚠1648

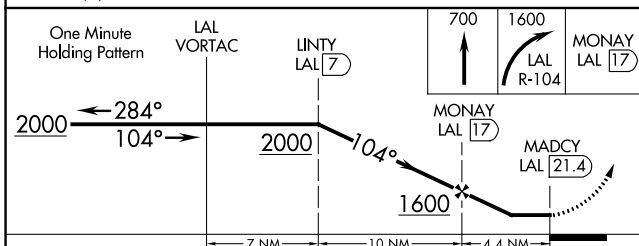

CATEGORY	A	B	C	D
CIRCLING	620-1 493 (500-1)	620-1¼ 493 (500-1¼)	620-1½ 493 (500-1½)	680-2 553 (600-2)

REIL Rwy 6 and 24 0
MIRL Rwy 6-24 0

SE-3, 08 OCT 2020 to 05 NOV 2020

SE-3, 08 OCT 2020 to 05 NOV 2020